

EUAL 150

- Max Flow Rate:** 23Lpm (6gpm)
- Port Size:** Inlet: 12.70mm (1/2" BSP)
Discharge: 12.70mm (1/2" BSP)
Air Inlet: 6.35mm (1/4" BSP)
Air Exhaust: 12.70mm (1/2" BSP)
- Suction Lift:** Dry: 1.45m (4.75')
Wet: 2.83m (9.28')
- Teflon:** Dry: 0.50m (1.64')
Wet: 0.90m (2.95')
- Max Particle Size (Dia):** 2mm (0.078")



EUAL 150 Bolted


Also available in Cast Iron



EUCI 150 Bolted

PERFORMANCE

EUAL 150 | 1/2" (15mm)

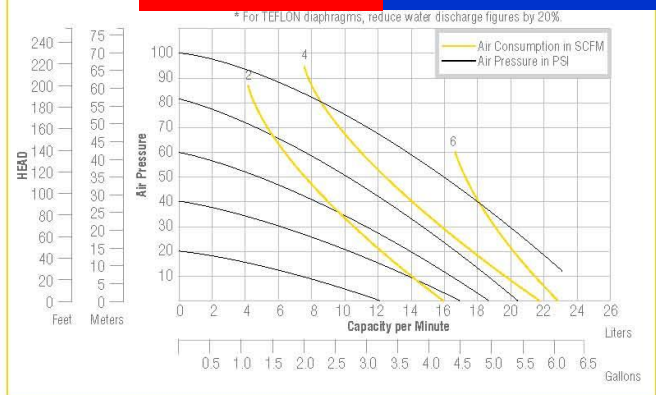

PRICE ADD-ON ACCESSORIES: Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •