

EUAL 80

- Max Flow Rate:** 900Lpm (238gpm)
- Port Size:** Inlet: 76.20mm (3" BSP)
Discharge: 76.20mm (3" BSP)
Air Inlet: 12.70mm (1/2" BSP)
Air Exhaust: 19.05mm (3/4" BSP)
- Suction Lift:** Dry: 6.09m (20')
Wet: 7.62m (25')
- Teflon:** Dry: 3.05m (10')
Wet: 6.09m (20')
- Max Particle Size (Dia):** 19.10mm (0.750")



EUAL 80 Clamped


Also available in Cast Iron



EUCI 80 Clamped

PERFORMANCE

EUAL 80 | 3" (80mm)

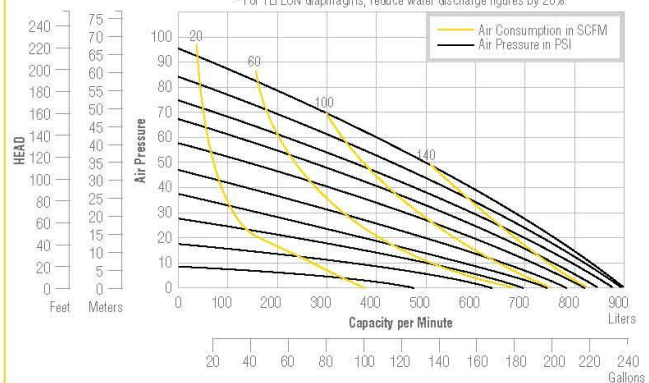

PRICE ADD-ON ACCESSORIES: Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •