

EUPP 50/500

- Max Flow Rate:** 586Lpm (155gpm)
- Port Size:** Inlet: 50.80mm (2" BSP)
Discharge: 50.80mm (2" BSP)
Air Inlet: 12.70mm (1/2" BSP)
Air Exhaust: 19.05mm (3/4" BSP)
- Suction Lift:** Dry: 4.57m (15')
Wet: 7.62m (25')
- Teflon:** Dry: 3.05m (10')
Wet: 6.09m (20')
- Max Particle Size (Dia):** 6.35mm (0.250")



EUPP 500 Bolted



EUPP 50 Clamped

CLAMPED model available for specific applications

Also available in PVDF



EUPVDF 500 Bolted




EUPVDF 50 Clamped

CLAMPED model available for specific applications

PERFORMANCE

EUPP 50/500 | 2" (50mm)

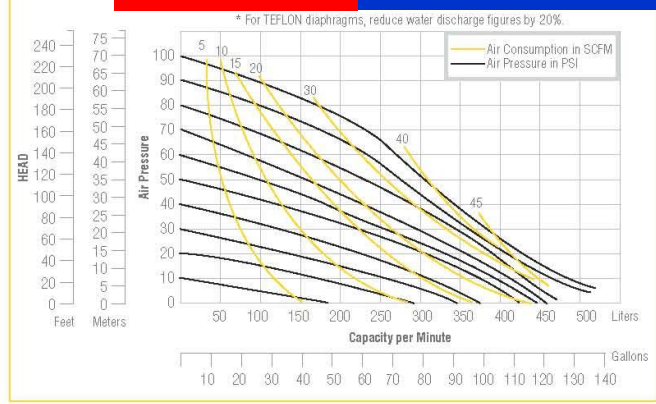

PRICE ADD-ON ACCESSORIES: Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •