

# EUSS 40/400

- Max Flow Rate:** 270Lpm (72gpm)
- Port Size:**
  - Inlet: 38.10mm (1½" BSP)
  - Discharge: 38.10mm (1½" BSP)
  - Air Inlet: 9.64mm (⅜" BSP)
  - Air Exhaust: 12.70mm (½" BSP)
- Suction Lift:**
  - Dry: 4.57m (15')
  - Wet: 7.62m (25')
- Teflon:**
  - Dry: 3.05m (10')
  - Wet: 6.09m (20')
- Max Particle Size (Dia):** 4.76mm (0.188")




**EUSS 400 Bolted**



**EUSS 40 Clamped**

CLAMPED model available for specific applications

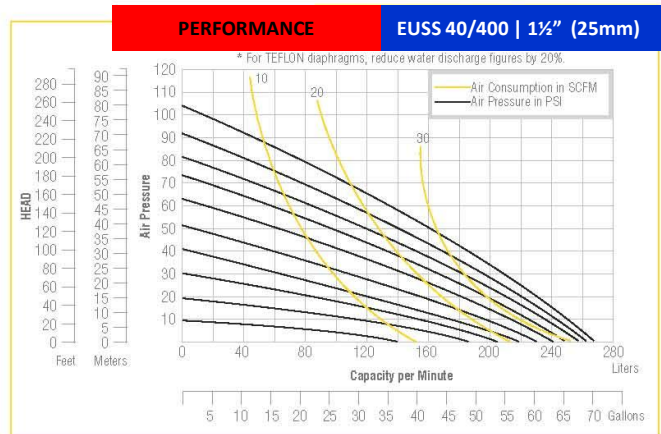

**PRICE ADD-ON ACCESSORIES:** Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •