

EUSS 55/500

- Max Flow Rate:** 586Lpm (155gpm)
- Port Size:** Inlet: 50.80mm (2" BSP)
Discharge: 50.80mm (2" BSP)
Air Inlet: 12.70mm (1/2" BSP)
Air Exhaust: 19.05mm (3/4" BSP)
- Suction Lift:** Dry: 4.57m (15')
Wet: 7.62m (25')
- Teflon:** Dry: 3.05m (10')
Wet: 6.09m (20')
- Max Particle Size (Dia):** 6.35mm (0.250")




EUSS 500 Bolted



EUSS 55 Clamped

CLAMPED model available for specific applications

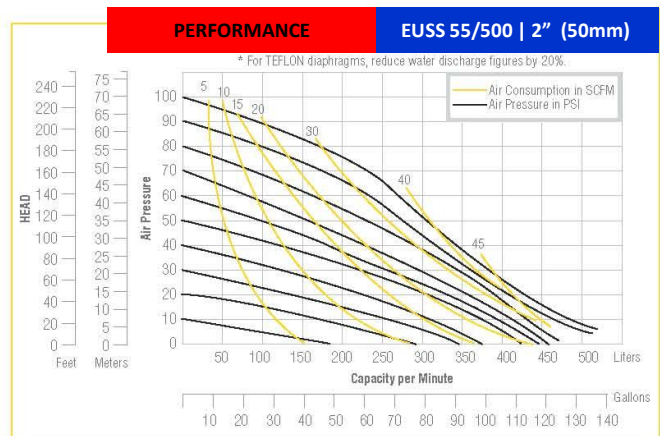

PRICE ADD-ON ACCESSORIES: Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •